

! " # \$ % & # ' (") * + (, - . / 0 1 2 0 (

This product is designed for fiber-communication based on optical-electrical technology. The product is an integrated module containing a micro-optic component and semiconductor material. The module could implement optical-electrical conversion and electrical-optical conversion function. It could be used at key locations in optical networks like 100GBASE Ethernet.

3 4 " 5) 6 \$ + 6 7 8

Features

- Up to 28Gb/s data rate per channel
- Distance up to 300m on OM4 MMF
- 850nm VCSEL array transmitters
- Single 1x12 MPO receptacle optical interface
- Single +3.3V power supply
- Maximum power dissipation < 2W
- International Class 1 laser safety certified
- Operating temperature range: 0°C ~ +70°C
- Compliant with RoHS6

Applications


- 100GBASE-SR4 Ethernet

Standards

- Compliant with SFF-8636 (V2.6)
- Compliant with IEEE Std 802.3bm 2015
- Compliant with SFF-8665 (V1.9), SFF-8661 (V2.3) and SFF-8679 (V1.7)

" \$ 4 5 6 # 6 5 9 + 6 7 8

5-3.96094(3n063(") 0.03) 4 [() 0

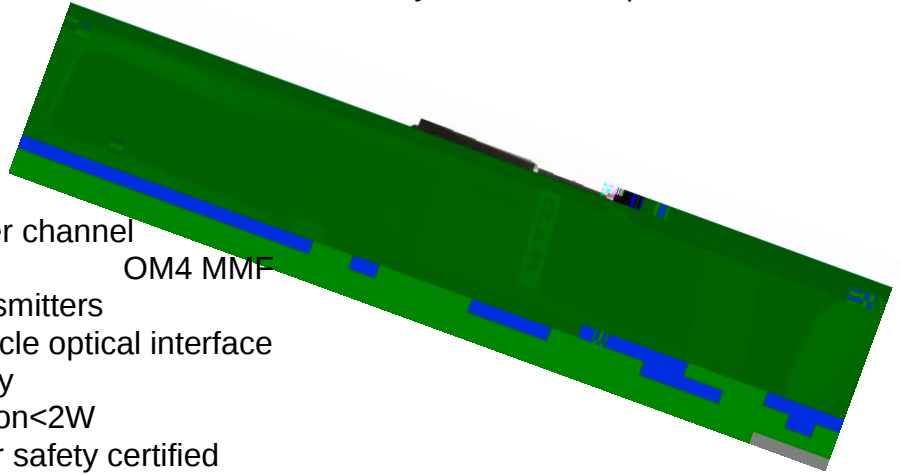

! " # \$ % & # ' (") * + (, - . / 0 1 2 0 (

) 0 0 H ? , @ ' (M 5 ' K L ? 1 , - / 0

#0, @H(0	+0. @ = 0 @ P ' I	\$0(A' (K, - /0
RoHS	BS EN 1122: 2001 US EPA METHOD 3050B US EPA METHOD 3052 US EPA METHOD 3060A	Pb <1000ppm Cr6+ <1000ppm Hg <1000ppm PBB <1000ppm PBDE <1000ppm Cd <100ppm
Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD-883E Method 3015.7	Class 1 (>1.5kV) – Human Body Model
Electrostatic Discharge (ESD) Immunity	IEC61000-4-2	LV4(Air discharge 15kV, Contact discharge 8kV) Performance criterion B
Electromagnetic Interference (EMI)	CISPR22 ITE Class B FCC Class B CENELEC EN55022 VCCI Class 1	Compliant with standard
Immunity	IEC61000-4-3 Class 2	Typically show no measurable effect from a 3 V/m field swept from 80 to 1000MHz applied to the transceiver without a chassis enclosure.
Safety	FDA	
	UL 94V-0	
	TUV	
	CE	

! " # \$ % & # ' (") * + (, - . / 0 1 2 0 (

7 (1 0 (1 - 0 6 - A ' (K , @ 1 ' -

Part No	Product Description	Data Rate	Tx	Tx Power (dBm)	Rx	OMA Sensitivity (dBm)	Temp (°C)	Reach (m)	Power (W)
RTXM420-550	QSFP28 SR4	4*25G	850nm VCSEL	-4~ 2.4	PIN	-7.4	0~70	100	<2
RTXM420-551	QSFP28 eSR4	4*25G	850nm VCSEL	-4 ~ 2.4	PIN	-7.4	0~70	300	<2
RTXM420-552	QSFP28 SR4	4*28G	850nm VCSEL	-4 ~ 2.4	PIN	-7.4	0~70	100	<2
RTXM420-553	QSFP28 eSR4	4*28G	850nm VCSEL	-4 ~ 2.4	PIN	-7.4	0~70	300	<2
RTXM420-554	QSFP28 SR4	4*24G& 4*25.G	850nm VCSEL	-4 ~ 2.4	PIN	-7.4	-10~75	100	<2