

The 1550nm cooled EML laser based 10Gigabit
SFP+


Pa N

S c a


A a

Pa a	S	b	U	M	T	Ma	N

			This pin is open collector compatible, and should be pulled up to Host Vcc with a 10kΩ resistor.
3	TX Disable	Transmitter Disable In (LVTTL)	This pin is internally pulled up to VccT with a 10 kΩ resistor.
4	SDA	Serial ID with SFF 8472 Diagnostics Module Definition Identifiers	

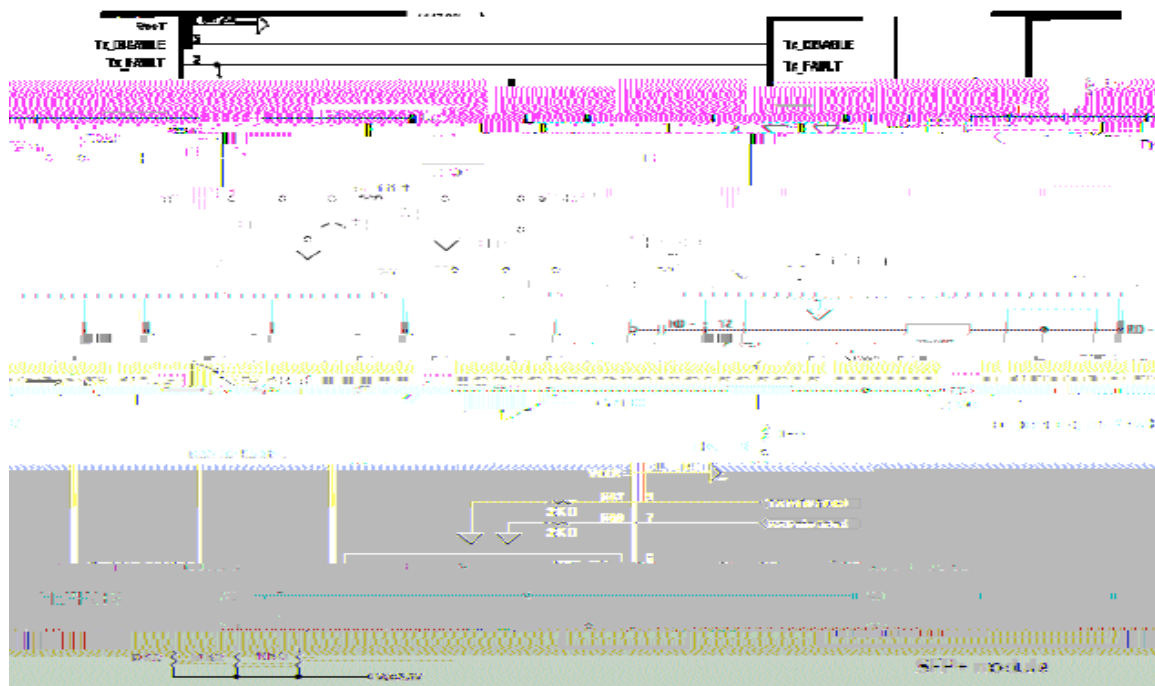

Unit: mm
 specified Tolerance: $\pm 0.2\text{mm}$

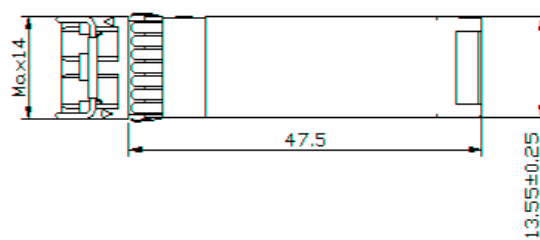

Unit

